



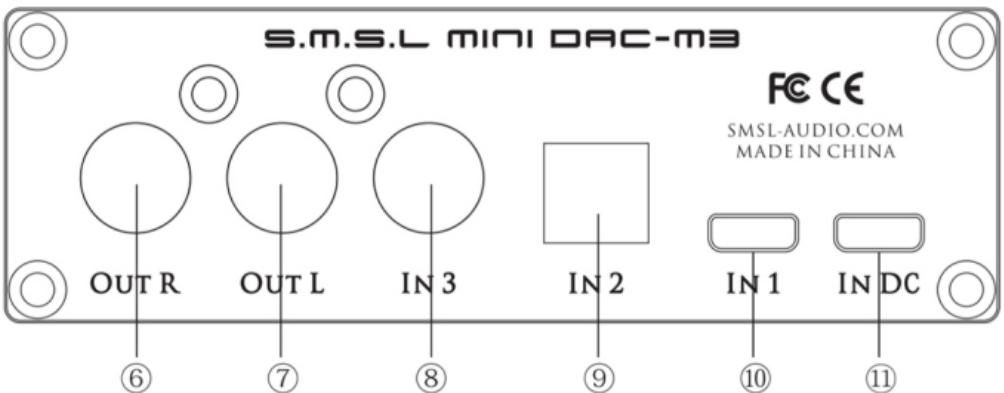

S.M.S.L
WWW.SMSL-AUDIO.COM

INPUTS:
USB • Optical • coaxial
OUTPUTS:
Line • Headphone Amp

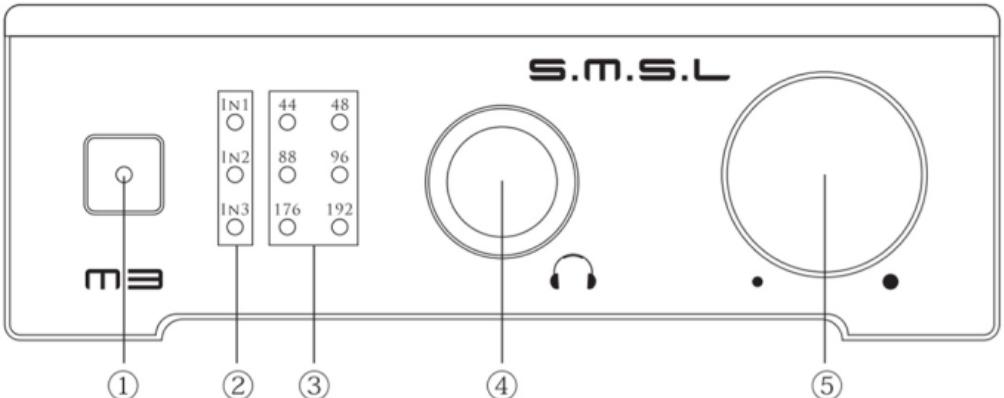

- ① Function keys
Short press for audio source selection (three kinds of input Switching)
Long press means turn ON or OFF
- ② Input mode LED
- ③ Sampling rate detection(khz)
- ④ Analog output
- ⑤ Volume control
- ⑥ RCA right channel analog output
- ⑦ RCA Left channel analog output
- ⑧ Coaxial input
- ⑨ Optical input
- ⑩ USB input
- ⑪ Power input

Specifications

Output levels : 1.9Vrms

THD+N : 0.0006%

Dynamic Range : 112dB

SNR : 107dB

Channel separation : 105dB

Sample rate :

USB:96KHz(24bit)

Optcal & coaxia:192KHz(24bit)

Amp output power :

32Ω 108mW @THD=0.1%

64Ω 85mW @THD=0.1%

150Ω 49mW @THD=0.001%

300Ω 24mW @THD=0.001%

THD+N : 0.0002%

SNR : 100dB



Designed and manufactured by SMSL in China
Shenzhen Shuang Mu San Lin Electronics Co. Ltd.